

DECK PLUS[®]

LIFETIME GUARANTEE

IDEAL FOR DECKING EXTERIOR WOOD PROJECTS

Screws Built for Results, Guaranteed for Life[™]


FRUSTRATION FREE

Star drive eliminates slipping and stripping



LEAVES A CLEAN FINISH

Advanced counter sink chisels eliminates wood splintering. Reinforced neck for strength



FASTER & EASIER

Serrated threads allow for less drive torque and longer battery life




REDUCES BOARD SPLITTING

Fast start drill point requires no pre-drilling



**BUILT STRONG THROUGH
INNOVATION**

Available in
Green,
Tan, Red,
and 305 SS

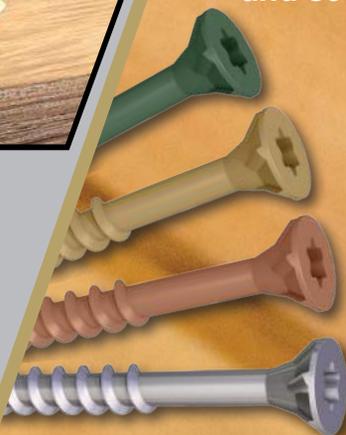

**Fastening
Systems**

A Division of The Hillman Group

CALL 1-800-352-4864

DURABLE EPOXY COATING

4 LAYERS OF PROTECTION

From Sun, Temperature, Rain, Snow, Sap and Chemicals Found in Treated Lumber Exceeds 1,000 hours in salt spray testing

01

ZINC LAYER

02

CHEMICAL ADHESION LAYER

03

EPOXY COATING

04

DURABLE PROTECTIVE FINISH

ENVIRONMENT APPLICATIONS

Epoxy Coated

URBAN

AGRICULTURE

INDUSTRIAL

- Epoxy Coating
- For Use on Treated Lumber, Cedar, Redwood

305 Stainless Steel

URBAN

AGRICULTURE

INDUSTRIAL


MARINE

- Stainless Steel For Ultimate Corrosion Protection
- For Use On Treated Lumber, Cedar, Redwood
- Within 5 Miles of Coastal Water

SIZES

Exterior Screws

Flat Head Style
6 Lobe
T-25



Quantity / Weight


SIZE	1 LB	5 LB	1/8 Keg	1/4 Keg	Corg. 1/4 Keg
8 x 1 1/4"	186	N/A	N/A	N/A	N/A
8 x 1 5/8"	147	735	1700	N/A	N/A
8 x 2"	98	490	1500	3000	3000
10 x 2 1/2"	79	395	1000	1975	1975
10 x 3"	66	330	800	1650	1650
10 x 3 1/2"	55	275	700	1400	1400

Available Colors

Superior weather protection while coordinating with your decking finish.

Stainless Steel Exterior Screws

Flat Trim Head
Style
6 Lobe
T-25



Quantity / Weight

SIZE	1 LB	5 LB	1/4 Keg	Corg. 1/4 Keg
8 X 1 5/8"	147	N/A	N/A	N/A
8 x 2"	98	N/A	3500	3500
10 x 2 1/2"	79	395	N/A	N/A
10 x 3"	66	330	N/A	N/A


WOOD TO WOOD APPLICATIONS

- Decks
- Trim
- Railings
- Fencing
- Wood to Wood Projects

LIMITED LIFETIME GUARANTEE

Deck Plus® Exterior Screws feature a limited lifetime guarantee against rust and corrosion.

The fastener coating is guaranteed against corrosion in cedar, redwood, and treated wood for the life of the project.

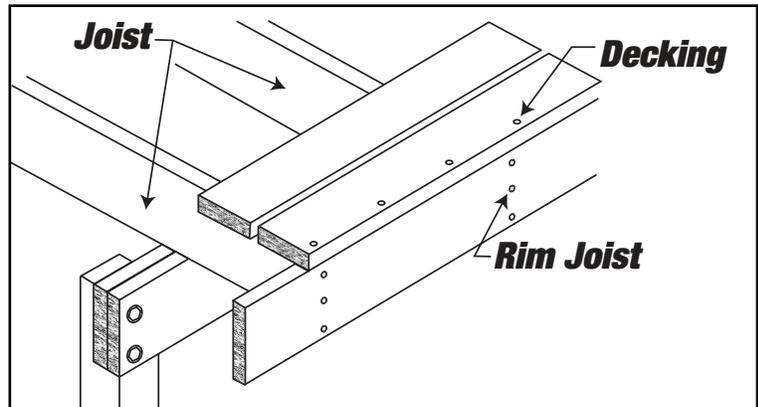

Decking

TECHNICAL INFORMATION

	Major Diameter	Minor Diameter	Head Diameter	Ult. Tensile Strength	Min. Torsional Strength	Ult. Torsional Strength	Nom. Shear Strength	
			Flat	Epoxy Coated	Epoxy Coated	Epoxy Coated	Epoxy Coated	
							Shoulder	Threads
#10	.195"/.203"	.134"MAX	.365"/.345"	2656 LBS.	50 IN-LBS	75 IN-LBS	2317 LBS.	2241 LBS.

PULL OUT STRENGTH

Pull-Out Strength Value	Designation	Material		
		Pressure Treated Yellow Pine		
		Embedded Depth	1"	2"
	Installation Torque	< 35	< 35	< 35
#10		809 avg.	1516 avg.	1911 avg.